
RJ11 US Jack to France jack ADSL Splitter filter CN-11B



Product Features:

ADSL splitter, Line, phone, modem, three connect ways, split ADSL digital signal from phone signal. Phone and internet go both For OEM or ODM



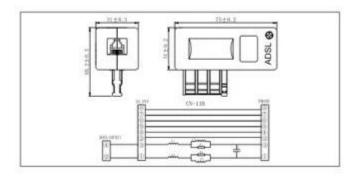

Specs& Description:

- 1. ADSL CPE splitter
- 2. ADSL micro filter
- 3. Suitable for ADSL modem, routers
- 4· Design for G.lite application
- 5· Application for Italy, the UK and the US,French markets
- 6. Compact package, easy installation
- 7. All our ADSL splitters meet International Telecommunications Union (ITU) standard

POST PORT IMPEDANCE		Zr=600 Ω
Modem impedance	30 kHz to 1.1M Hz	100 Ω
Insertion loss	@ 1020 Hz	<0.3dB

	200 Hz=14 dB	
	500 Hz< f< 2000 Hz	>=18 dB
	2000 Hz< f< 3400 Hz	>=14 dB
Longitudinal conversion loss LCL	50 Hz< f< 600 Hz	> =40 dB
	600 Hz< f< 3400 Hz	>=46dB
	3400 Hz< f< 30K Hz	>=40dB
	30K Hz< f< 1104K Hz	>=45dB
	1104K Hz< f< 4.4M Hz	>30 dB
Delay distortion	500 Hz5MΩ	
Stop band attenuation	30 kHz36dB	
	138 kHz55dB	

Product Packaging:

Qty: 1pcs/bag,50pcs/box, 500pcs/CTN

CTN Size: 40*38*28 CM

N.W.: 12 KG G.W.: 13 KG

Why Choose US:

Our goal is to provide customers products of high quality, competitive price, and superior services.

- 1.Established in 2005, about 10 years of history;
- 2.Own main factories, supply diversification products and One stop service
- 3. Certificates of ISO9001, UL, CE, EMC, CQC, RoHS, Reach, etc.
- 4. Six years Gold member in Alibaba, Aliexpress etc
- 5. Production capability more than 100 thousands pcs/ month;
- 6.Monthly export more than 50 times delivery;
- 7. Exported to more than 20 countries and regions;
- 8. We provide an excellent combination between prices, quality & respond, delivery, after-sales!

