

ب--الأراضي سهله التركيب الغطاء المنفذ لوحه/ديكور/المزدوجة الولايات الامريكه الجدار منفذ
غطاء لوحه الناقل التسلسلي العام منافذ الجدار غطاء لوحه

Appliaction




Rated voltage	100-240V	Current Rating	15A /20A
Creepage distance	≥3mm	CLEARANCE	≥3mm
Conductor material	Phosphor Bronze	Housing Material	PC fire-retardant
Mechanical life	≥ 5000 times (USB plugs and receptacles not exceeding 10mm / sec mating frequency of less than 12 beats / min)	DC output voltage	DC 5V
Output voltage tolerance	±3%	Output current	0~2100mA/4000mA
DC output power	10.5W max	power	78%
No-load power consumption	0.2W max	Input voltage	100 - 240V/AC 50~60Hz
Housing Material	PC fire-retardant	Temperature, humidity	-10℃ ~ +40℃ 20% ~ 90% RH
Storage Temperature, Humidity	-20℃ ~ +85℃ 10% ~ 95% RH	Pressure resistance	Between the input output 3KV / AC
Isolation resistance	Input and output 500VDC / 100MΩ	Carton size	40*26*30cm
Qty	1Pcs / box; 50Pcs / box		

INSTALLATION INSTRUCTIONS

1. Cut off power outlet and
remove cover plate



2. Insert USB wall plate
into socket surface

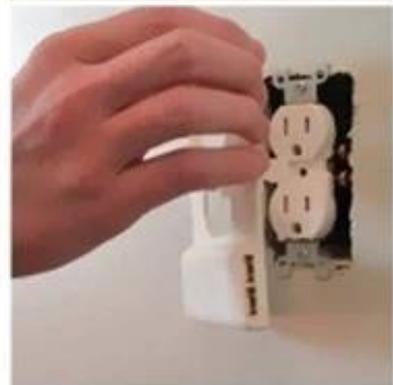

3. Tighten the screw

