

USB 2.1A 4.2A

125V 15A

115x70

1. PC
2. Inside
- 3.
- 4.
5. USB C USB
6. 2100 mA 4000 mA
7. iPod iPhone iPad MP3 Bluetooth GPS




115x70

115x70 mm

115x70

1. 符合 CE / FCC / RoHS 认证  
 2. 符合 PC 兼容  
 3. 符合 USB 2.0 标准  
 4. 输入 AC125V / 15A  
 5. 输出 USB DC 5.0V / 2100mA / 4000mA  
 6. 额定功率 150W  
 7. 使用寿命 > 10000 小时  
 8. 符合 ETL / ROHS 认证  
 9. 绝缘耐压 3KV / AC  
 10. 绝缘电阻 500VDC / 100MΩ  
 11. 工作温度 -10°C ~ +40°C 20%~90%RH  
 12. 存储温度 -20°C ~ +85°C 10%~95%RH

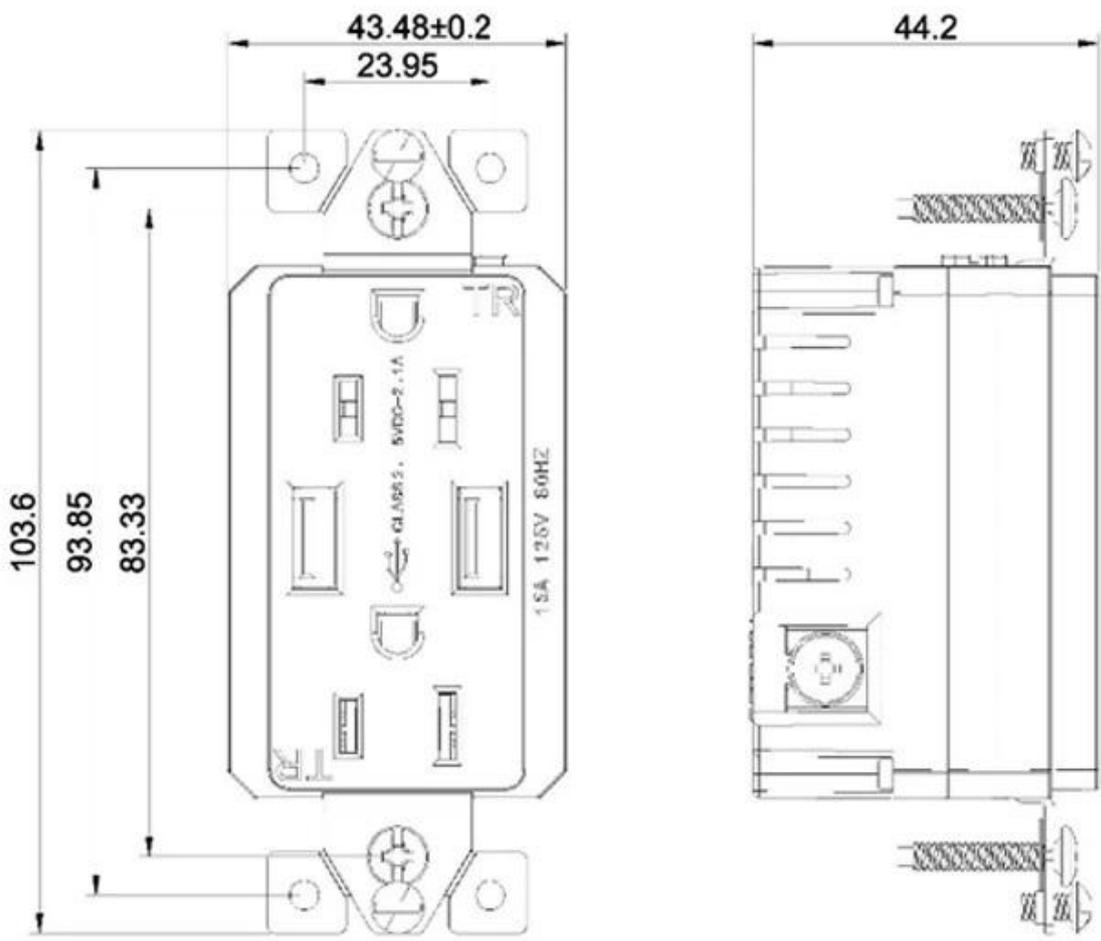

1. 符合 CE / FCC / RoHS 认证  
 2. 符合 PC 兼容  
 3. 符合 USB 2.0 标准  
 4. 输入 AC125V / 15A  
 5. 输出 USB DC 5.0V / 2100mA / 4000mA  
 6. 额定功率 150W  
 7. 使用寿命 > 10000 小时  
 8. 符合 ETL / ROHS 认证  
 9. 绝缘耐压 3KV / AC  
 10. 绝缘电阻 500VDC / 100MΩ  
 11. 工作温度 -10°C ~ +40°C 20%~90%RH  
 12. 存储温度 -20°C ~ +85°C 10%~95%RH



1. 符合 CE / FCC / RoHS 认证





USB

# Professional Manufacture

## 5 Characteristics

