

**2.0M 1/5 CMOS USB 2.0 9mm**


**Product Features:**


Thickness	9mm
Image Sensor	1/5 " CMOS
Resolution	2MP
Frame Rate	1600
LED	6 LED
LED switch	Yes
I / O	USB2.0
Weight	6 CM
Interface	VGA / QVGA
Protection	IP67
Operating Temp	0 ~ 80 °C
Storage Temp	-20 ~ 62 °C
Humidity	15 ~ 85 % RH
OS	XP, 2000, 2003, 2007, 2008, Vista
Dimensions	145mm X 100mm X 40mm
Material	ABS
Frame Rate	30FPS
Color	RGB, CMYK, Magent
Humidity	15 ~ 85 % RH
Interface	USB 2.0, FireWire

**Notes:**

1. 1/5 CMOS sensor
2. 2MP resolution
3. LED indicator
4. XP, Vista, Win7 compatible, includes CD-ROM
5. PC software included
6. PC software included
7. Operating temperature range (0 ~ 80 °C)
8. Storage temperature range (-20 ~ 62 °C)

**Product Pictures:**

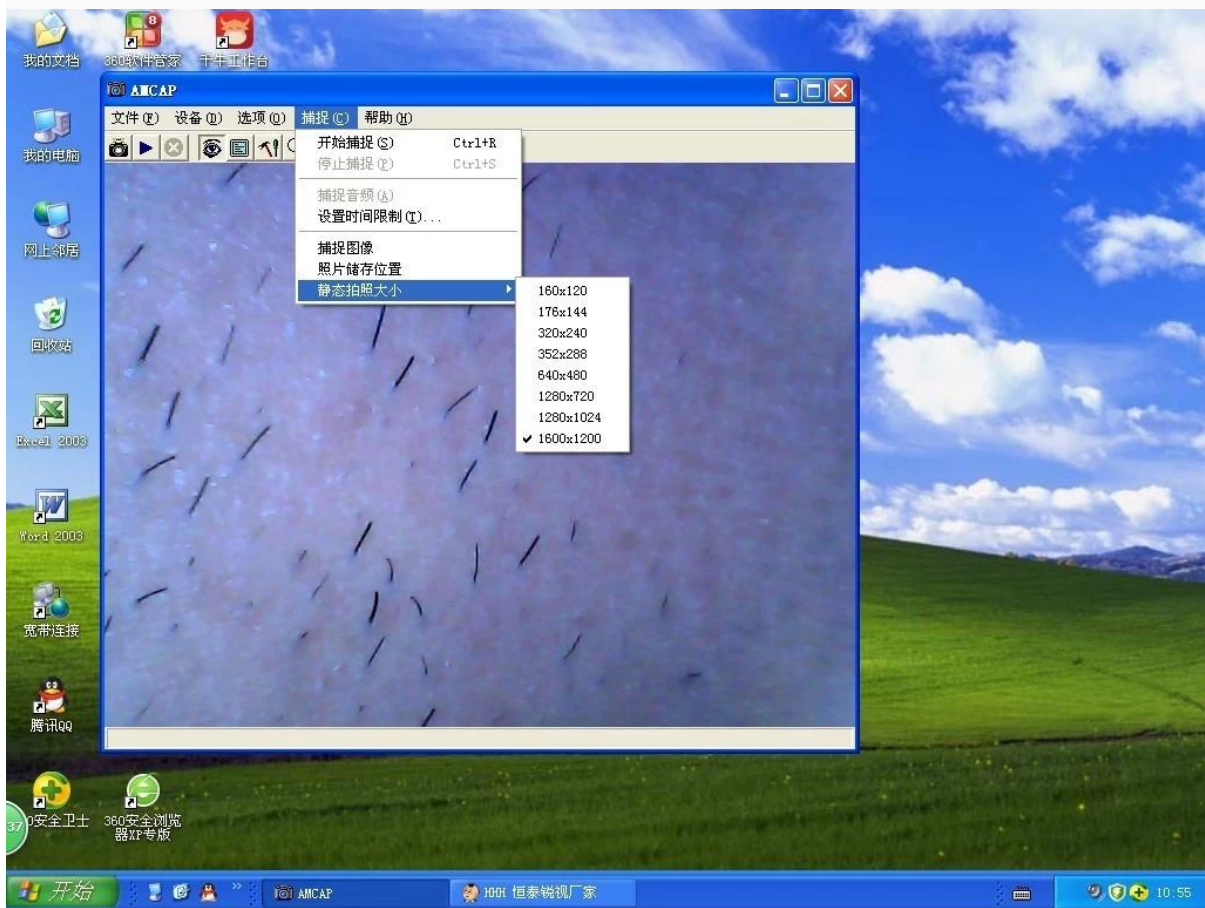

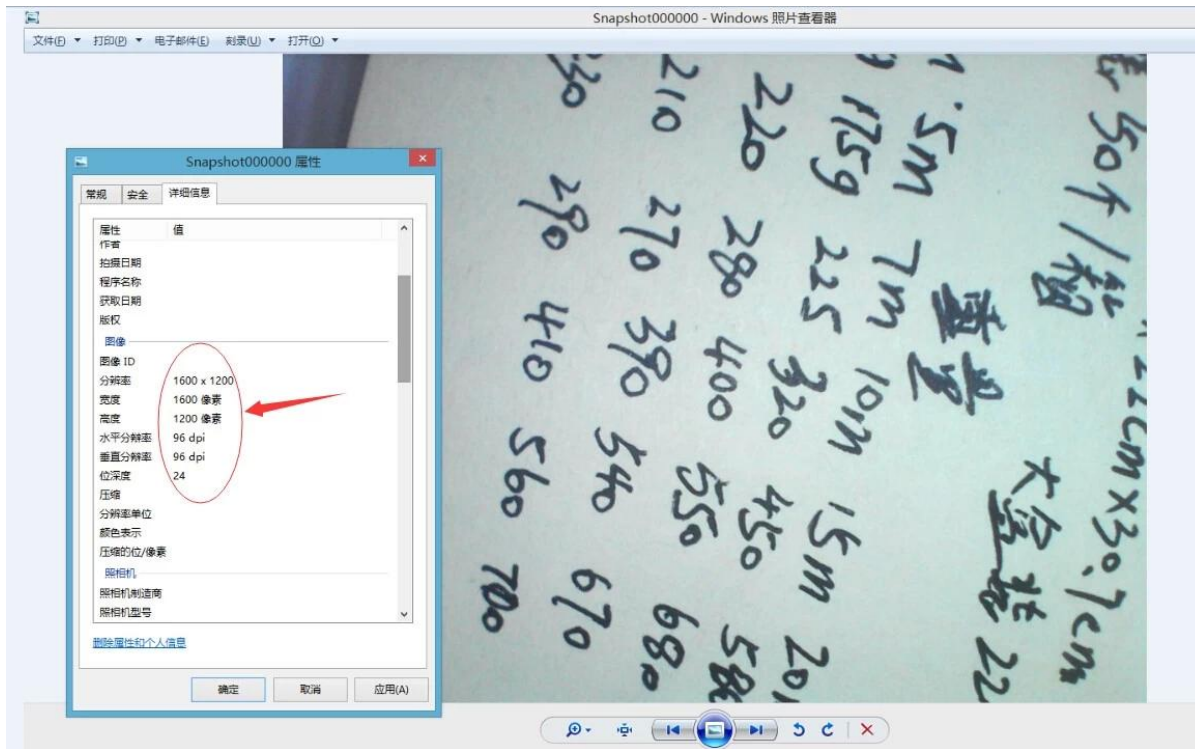

□□ □□ :

1. □□□ □ □□ X1
2. □□ □□ 1 □
3. □□□ □□□ 1 □
4. CD × 1
5. □□ X1, Magent□ 1 □, □□ 1 □

□□□ □ □□□ □□ :

- 1 □□□ CD-ROM□ CD□ □□
- 2 □□ : □□□ PC □□□□ □□ RsCap1.10 □□
- 3 □□ : □□□ PC□ □□ RsCap1.10 □□□ USB □□□ □□ □□
- 4 □□ : □□□□□□ □□ □□ □□ □□ □□ "□□ □□ □□"□ □□, "□□"□ □□□□□.
- 5 □□ : □□□ □□□ □□□ □□, □□ □□ □□ □□ "□□"□ □□□□□. □□□ □□□ □□□□□ □□, □□□ □□□ □□ "□□ □"□ □□□□□.

□□□ □□ :

2M / 5M / 7M : 145mm X 100mm X 40mm  
 10M / 15M / 20M : 178mm X 140mm X 50mm

□□ □□ :

- □□ □□ □□
- 2M SE-USBP-2M
  - 7M SE-USBP-7M
  - 10M SE-USBP - 1,000
  - 15M SE-USBP-15M
  - 20M SE-USBP-20M

**Approval Certification:**



## Why Choose US :

Our goal is to provide customers products of high quality, competitive price, and superior services.

- 1.Established in 2005, about 10 years of history;
- 2.Own main factories, supply diversification products and One stop service
- 3.Certificates of ISO9001, UL, CE, EMC,CQC,RoHS,Reach,etc.
- 4.Six years Gold member in Alibaba, Aliexpress etc
- 5.Production capability more than 100 thousands pcs/ month;
- 6.Monthly export more than 50 times delivery;
- 7.Exported to more than 20 countries and regions;
- 8.We provide an excellent combination between prices, quality & respond,delivery,after-sales!

