

115 * 70mm Wall Plate TR 15A 充電器 USB 充電 Type-A 充電 Type-C 充電



- 充電 : USB 充電
- 充電 : 充電
- 充電 : 充電 / 充電
- 充電 充電 : 充電 PC 充電
- 充電 充電 : 充電 充電
- AC 充電 充電 充電 : AC125V / 15A
- USB 充電 : DC 5.0V / 2100mA





- 額定電圧電流 : 100-240V / 15A
- 材質 : 樹脂
- 動作回数 : > 10000 回
- 耐電圧 : 3KV AC
- 規格 : CE, ROHS, TUV
- 耐湿性 : 3KV / AC
- 耐圧抵抗 : 500VDC / 100MΩ
- 寸法 : 115 x 70 mm



□□:

- 1.Shell □ □□ □□□ □□ □□ □□□ □□□ □□ □□□□ PC □□□, □□□.
2. □□ □□□ □□ □□ □□□ □□ □□ □□□ □□ □□ □ □□□ □□□□□.
- 3.Built□□ □□ □□ □□, □ □□□□.
4. □□ □□□□ □□□□ □□□□□.
- 5.USB □□ □ □□ C □□ □□□, □□□ □□ USB □□ □ □□ □□□ □□□□.
- 6.The □□ □□ 2100 mA, □□ □□□ □□ □ □□□□.
- 7.Compatibility : iPod, iPhone, iPad, □□, □□ □□, MP3 Bluetooth □□□, GPS & □.

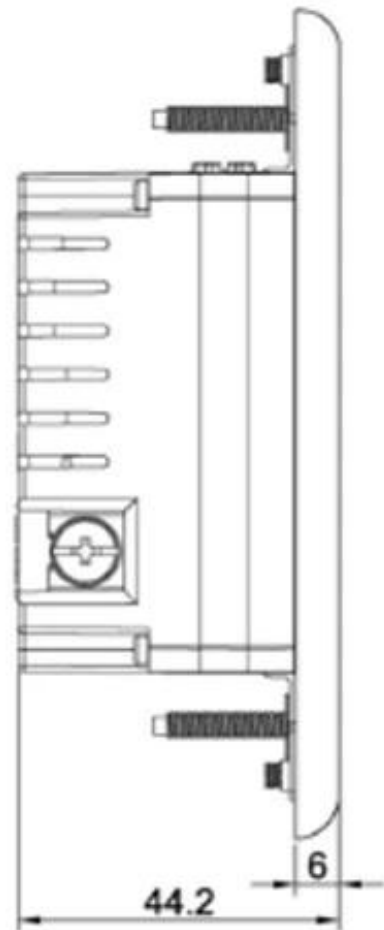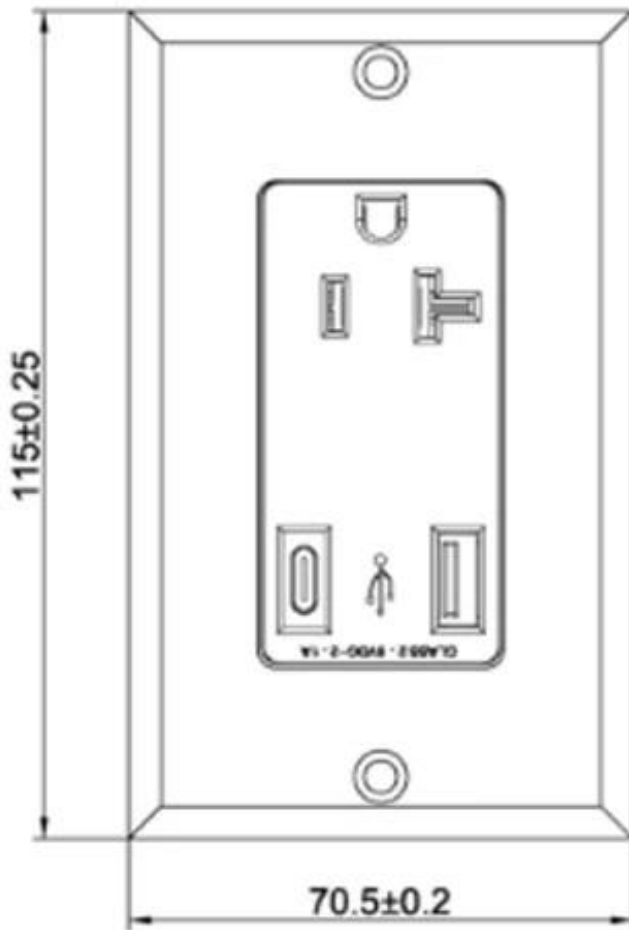


□□ □□ :

- □□ : □ □□
- □□ : □□ □□
- : □□□ / □□□
- □□ □□ : □□□ PC □□
- □□ □□ : □□ □ □□
- □□□ □□ : AC125V / 15A
- USB □□ : DC 5.0V / 2100mA
- □□ : □□
- □□ □ □□□ □□ : > 10000 □ □□
- □□ □□ : □□□ □□
- □□□ : □□, ROHS, TUV
- □□ Rustistance : □□ □□ 3KV / AC □□
- □□ Resistance : □□ □ □□ 500VDC / 100MΩ
- □□ : □□
- □□ □□ : 115 x 70 mm
- □□ □ □□□ □□ > 10000 □
- □□, □□ : -10 °C ~ + 40 °C; 20 % ~ 90 %
- □□ □□, □□ : -20 °C ~ + 85 °C; 10 % ~ 95 % RH



☐☐ & ☐☐

- ☐☐ : 1PCS / ☐☐ ☐☐ / ☐☐ ☐☐ / 50PCS / ☐☐
- ☐☐ ☐☐ : 40 * 26 * 30cm
- ☐☐ ☐☐ ☐☐ ☐☐.

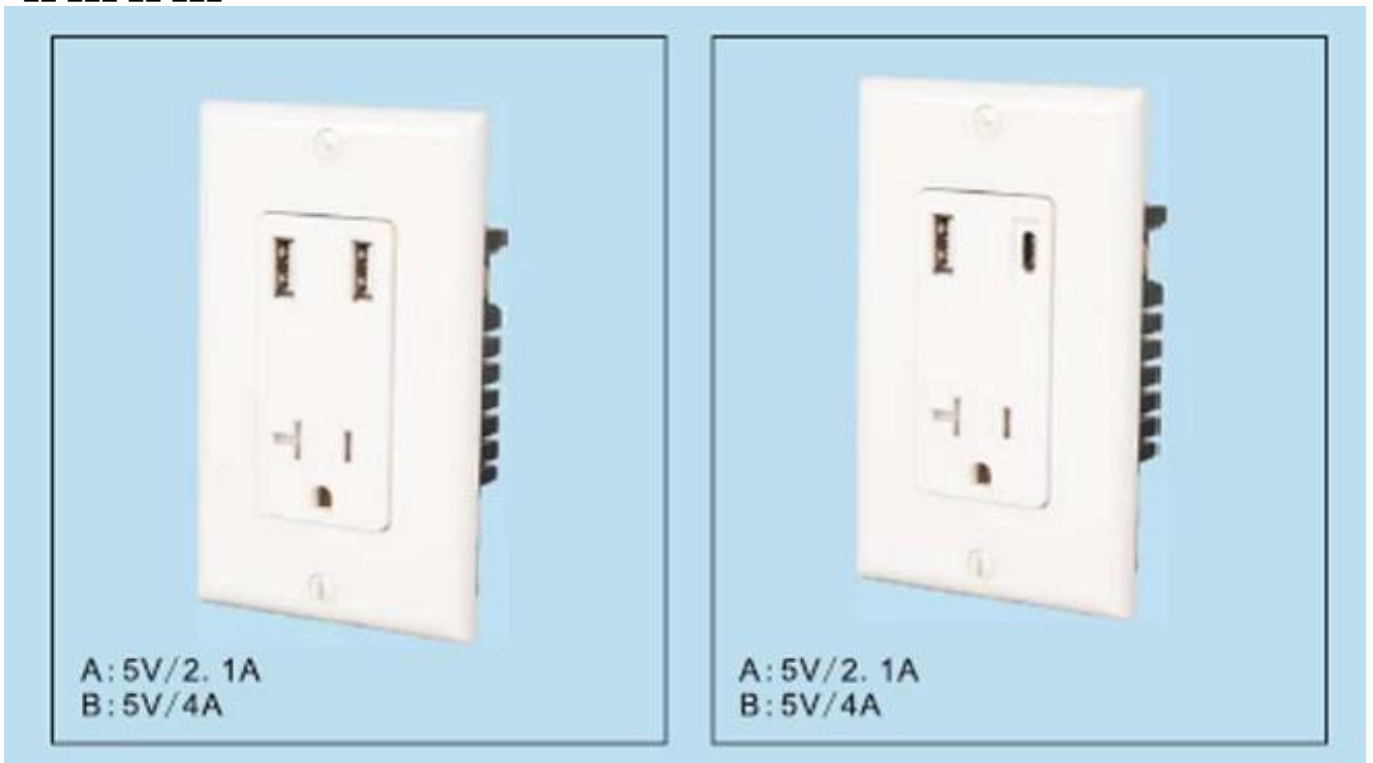

[USB ☐☐☐☐☐☐☐☐☐☐☐☐](#)



USB 1 1111 1111 11

Professional Manufacture

5 Characteristics



□□ □□ :

1. □□ □□ □□ □□ □□ □□ □□ □□ □□ □□.
2. □□ □□□□ □□□□ □□ □□ □□ □□.
3. □□ □□ □□ □□ □□□□ □□ □□ □□□□□□ □□ □□□□ □□.
4. □□ □□ □□ □□ □□□□ □□ □□ □□□□.
5. □□ □□, □□ □□ □□ □□ □□ □□ □□□□.