115\*70mm Wall Plate Smart USB wall Charger Type-A and Type-C Receptacle with TR 15A outlet



- · Type: USB Wall Socket
- · Grounding: Standard Grounding
- · Application: Residential / General-Purpose
- Main material: High quality PC Material
- $\cdot$  Inside Material: Tin phosphorous bronze
- · AC input parameters: AC125V /15A
- · USB output: DC 5.0V /2100mA



- · Electrical output Characteristics: 100-240V /15A
- $\cdot$  Color: White
- $\cdot$  Insert and Draw Frequency: >10000 times
- $\cdot$  Socket standard: Multi function socket
- $\cdot$  Certificate: CE,ROHS,TUV
- $\cdot$  Pressure Ressistance: Between the input output 3KV / AC
- $\cdot$  Isolation Ressistance: Input and output 500VDC / 100M $\Omega$
- · Product size: 115 x 70 mm



## Features:

1.Shell is made of high quality fire retardant PC material, up to the European environmental requirements, burning non-toxic.

2.Inside Material is made of Tin phosphorous bronze, with good electrical conductivity, not easily deformed.


3.Built-in automatic recovery fuse, more safe.


4. Automatically adjust charging Wattage.

5.USB charging and Type C interface, support more USB devices and mobile phone to charging at the same time.

6.The output current 2100 mA ,can reduce charging time.

7.Compatibility: iPod, iPhone, iPad, Tablets, Mobile Phones, MP3 Bluetooth Headsets, GPS & more.

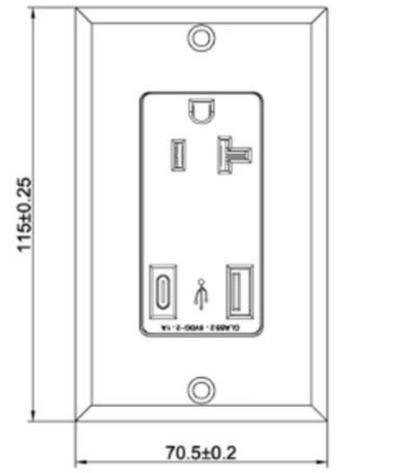

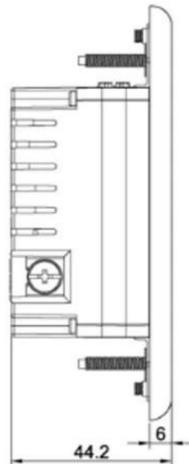

## Product Description:

- · Type: Wall Socket
- · Grounding: Standard Grounding
- · Application: Residential / General-Purpose
- · Main material: High quality PC Material
- · Inside Material: Tin phosphorous bronze
- Electrical Characteristics: AC125V /15A
- · USB output: DC 5.0V /2100mA
- $\cdot\,$  Color: White
- · Insert and Draw Frequency: >10000 times
- $\cdot\,$  Socket standard: Multi function socket
- · Certificate: CE,ROHS,TUV
- $\cdot\,$  Pressure Ressistance: Between the input output 3KV / AC
- $\cdot\,$  Isolation Ressistance: Input and output 500VDC / 100M $\Omega$
- $\cdot$  Color: White
- $\cdot$  Product size: 115 x 70 mm
- · Insert and Draw Frequency>10000 times
- · Temperature, humidity:-10°C ~ +40°C ; 20% ~ 90%
- $\cdot$  Storage Temperature, Humidity: -20°C ~ +85°C ; 10% ~ 95% RH



## Packaging & Shipping

- · Packaging: 1PCS/Poly bag/Inner box / 50PCS/Carton
- · Carton size: 40\*26\*30cm
  - Or as customized.





USB Wall Outlet Charger supplier



USB Wall Outlet Charger factory



1.We can print your logo on products according to your requirements.

2. We can supply these products with spray painting.

3. We can manufacture these products on any color that you requested on the basis of your quantity.

4. We can manufacture your customized package.

5. Good quality with competitive price, different colors and sizes are available.