


Tubular motor controller, Garage door controller, Blinds controller for smart home

- 1.Operation voltage: 85Vac-250Vac
- 2.Operation temperature: -15 – 50degree
- 3.Position control: Position control accuracy 3% for upgoing and downgoing,
- 4.Auto-detect and stop in block condition: Both upgoing block and downgoing block.
- 5.Operation mode: control motor direction by push button and App control
- 6.Direction control: Control upgoing and downgo in by external switch or APP software

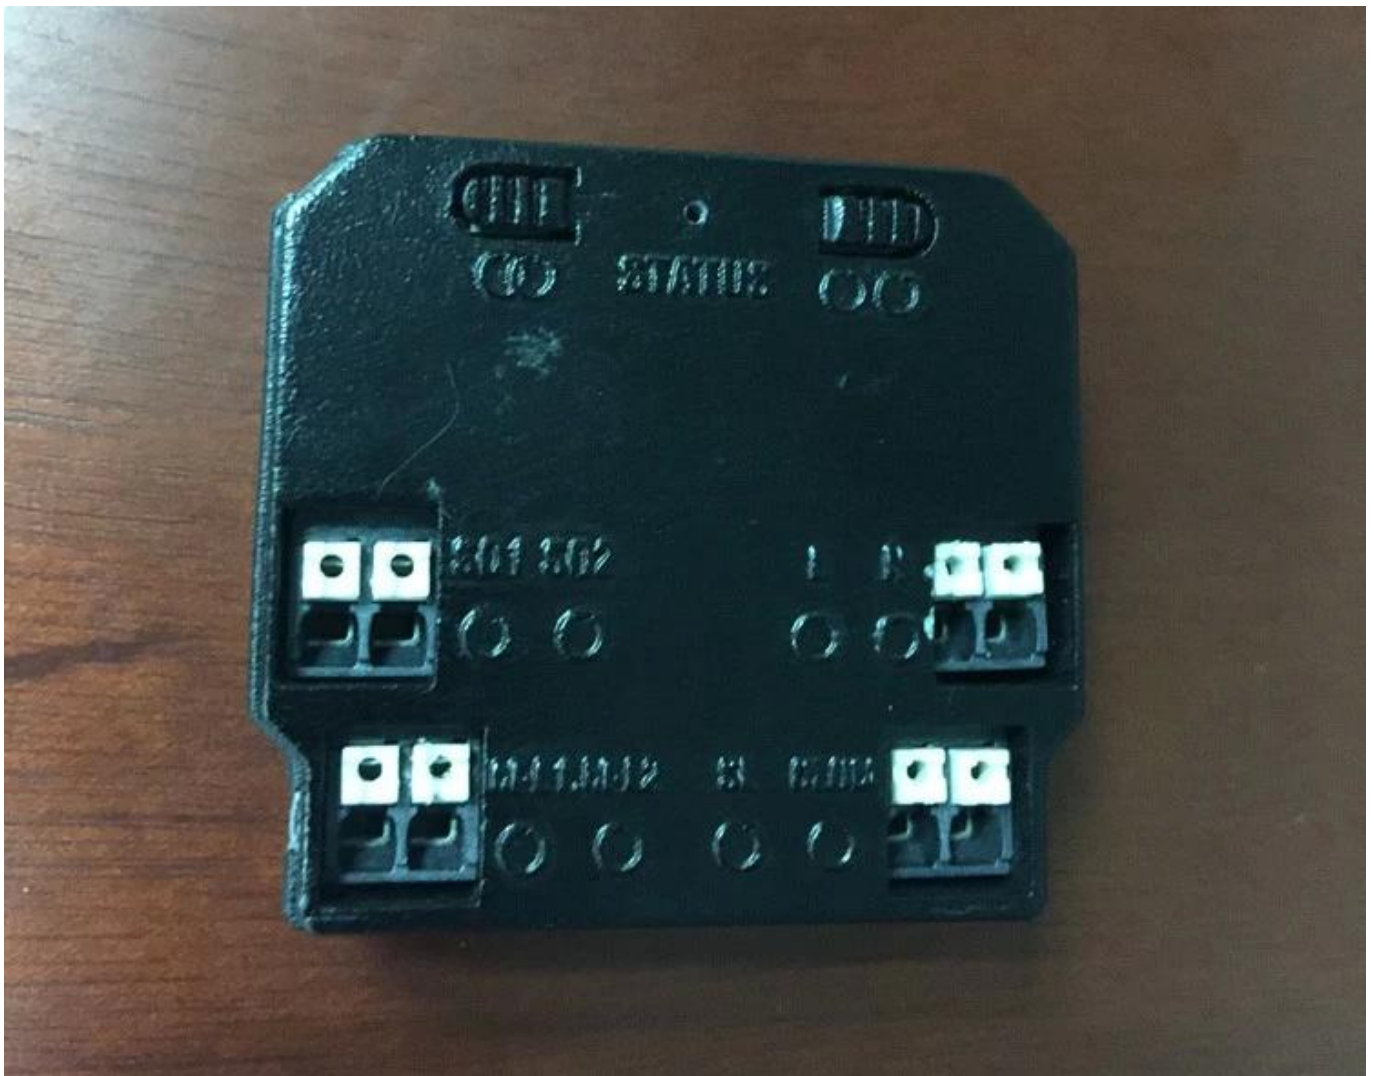

Two channels 10A ON-OFF controller with metering

- 1.Operation voltage: 85Vac-250Vac
- 2.Operation temperature: -15 – 50degree
- 3.ON-OFF control: two channels for 10A by switch of APP
- 4.Metering function: separate metering for two channels, with U,,PF,kW,kVA, kVAr,kWh,kVAh,KVArH
- 5.Over load protection: Set the threshold of each channel for overload protection by APP



Note: The sample housing in the figure is for reference only.